




OFFICINA ABA Srl

Via 25 Aprile, 20 – 59013 Montemurlo (PO) Italy

Tel: +39 0574 798181 Fax : +39 0574 791101 www.officinaaba.com commerciale@officinaaba.com

Roving Opener BAP

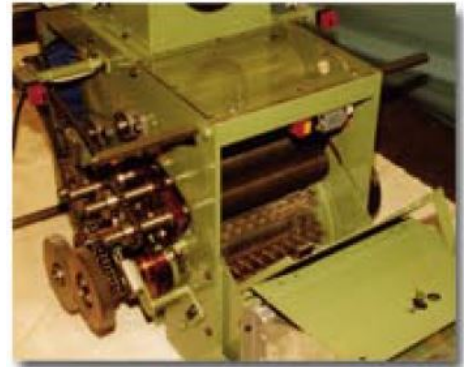

Working width 300mm

This machine has been conceived to recover the condenser spool wastes produced by the carding set

- Supporting frame out of steel
- Machine completely mounted on bearings and equipped of wheels
- Hopper feeder with Polycarbonate window
- N. 2 fins cylinders for pushing the material to the inlet cylinders
- N. 2 inlet cylinders \varnothing 85mm out of steel helicoidally toothed, with mobile support for inlet cylinder, hinged to the drum centre (in such a way it always remains adherent to the drum, even when the cylinders are opened) compressed by 4 springs
- Drum \varnothing 345mm on the tips with 10 steel staves with double row of tips \varnothing 10mm with lengthened cone 25mm out of tempered steel with superficial hardness 50 HRC
- Staves tightening system with brackets in order to be able to dismantle and reassemble them through the machine inlet door, without having to dismantle other mechanical parts
- N. 2 workers \varnothing 85mm clothed with metallic wire clothing
- Suction fan 3 HP at the outlet
- Variable-speed gear-motor 0.5 HP for the control of workers and inlet cylinders (for a better machine adjustment according to the material to be processed)
- Motor 5.5 HP for the control of the drum with tips
- Electric control panel

